


非イオン性界面活性剤
Nonionic surfactant

G920109C

1. Triton X-100

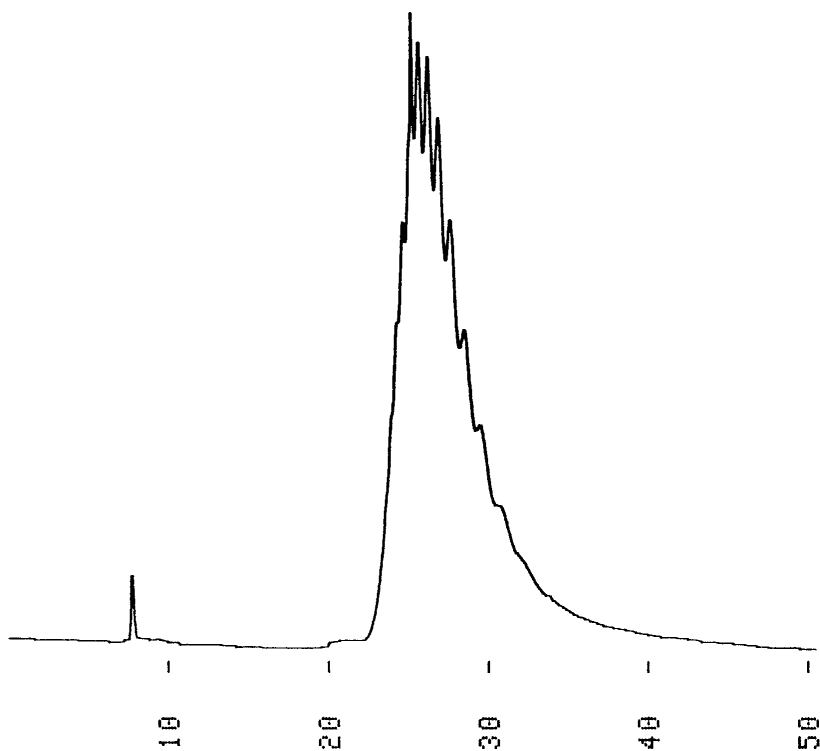

Column : YMC-Pack Diol-120
500 × 8.0 mm I.D.
Eluent : acetonitrile/water (10/90)
Flow rate : 1.0 mL/min
Temperature : ambient (23 °C)
Detection : UV at 260 nm, 0.02 AUFS
Injection : 15 μ L (5.0 mg/mL)
Sample : Triton X-100