
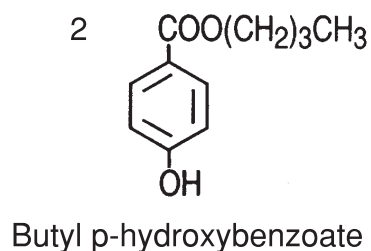



ペオノール  
Paeonol

S971106D

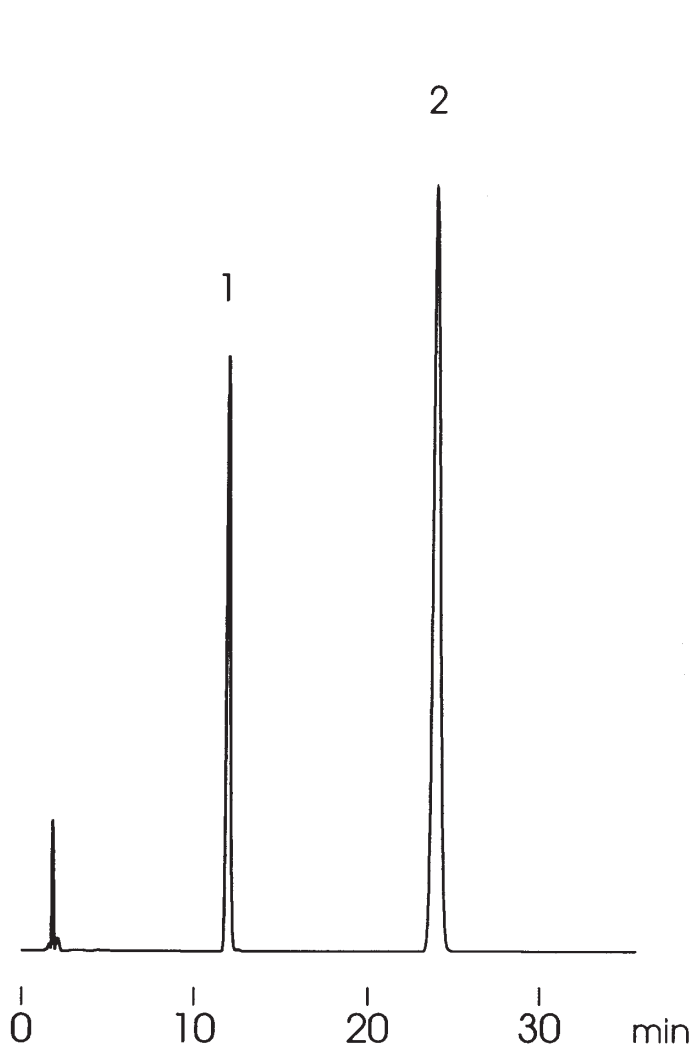

Column : YMC-Pack Pro C18 (5  $\mu$ m, 12nm)  
150  $\times$  4.6 mm I.D.

Eluent : acetonitrile/water/acetic acid (35/65/2)

Flow rate : 1.0 mL/min

Temperature : ambient (22  $^{\circ}$ C)

Detection : UV at 274 nm, 0.26 AUFS

Injection : 10  $\mu$ L (0.04, 0.2 mg/mL)

(日本薬局方第13改正記載条件)